


Absorptionsmålinger

DAMPA® Klimaloft

DAMPA® Clip-In ilagt WLT-D | 200 mm nedhængt | ST-15

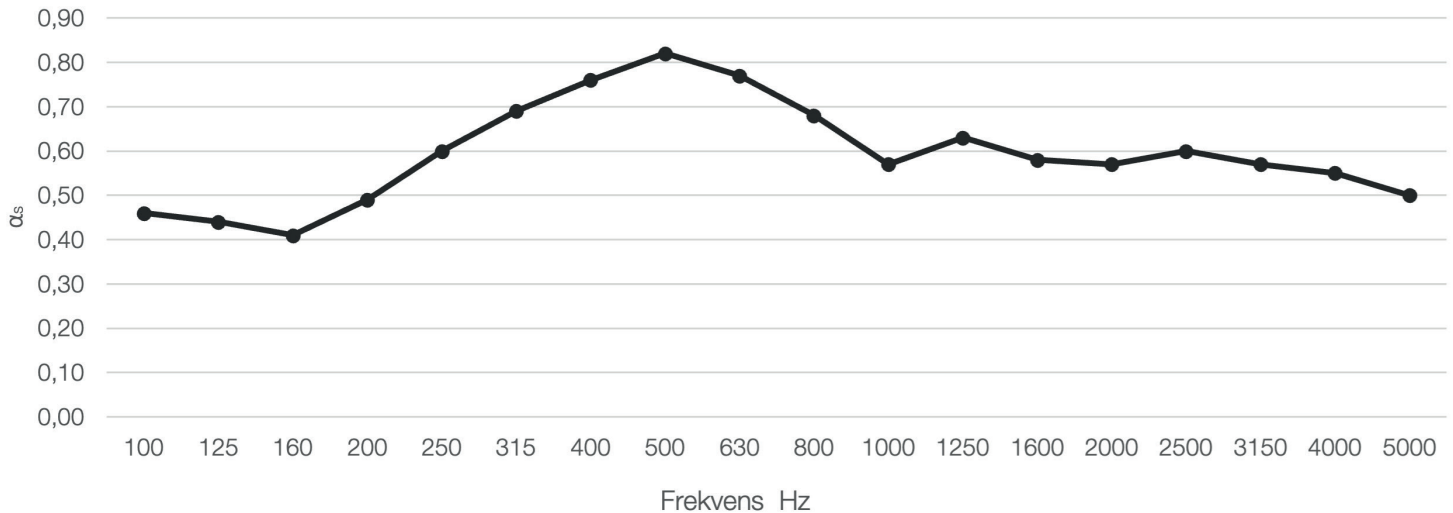

Frekvens Hz	Absorption α_s
100	0,46
125	0,44
160	0,41
200	0,49
250	0,60
315	0,69
400	0,76
500	0,82
630	0,77
800	0,68
1000	0,57
1250	0,63
1600	0,58
2000	0,57
2500	0,60
3150	0,57
4000	0,55
5000	0,50
NRC	0,65
α_w	0,65
Akustikklasse	C


DAMPA® Klimaloft

Perforation: ST-15

Åbningsgrad loft: 20,5%

Indlæg: 0,2 mm akustikfilt samt WLT-D 6 klimaelement

Nedhængshøjde: 200 mm

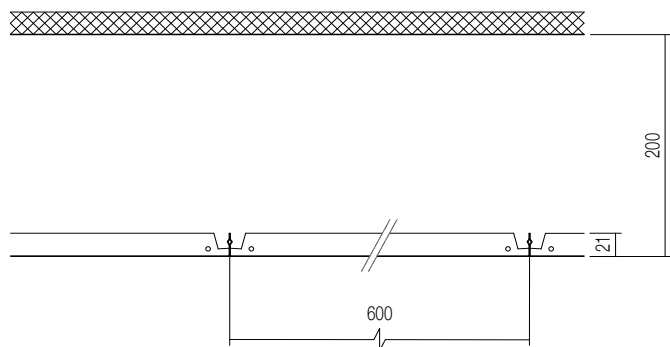

Perforation: ST-15

