


Absorptionsmålinger

DAMPA® Silent Board

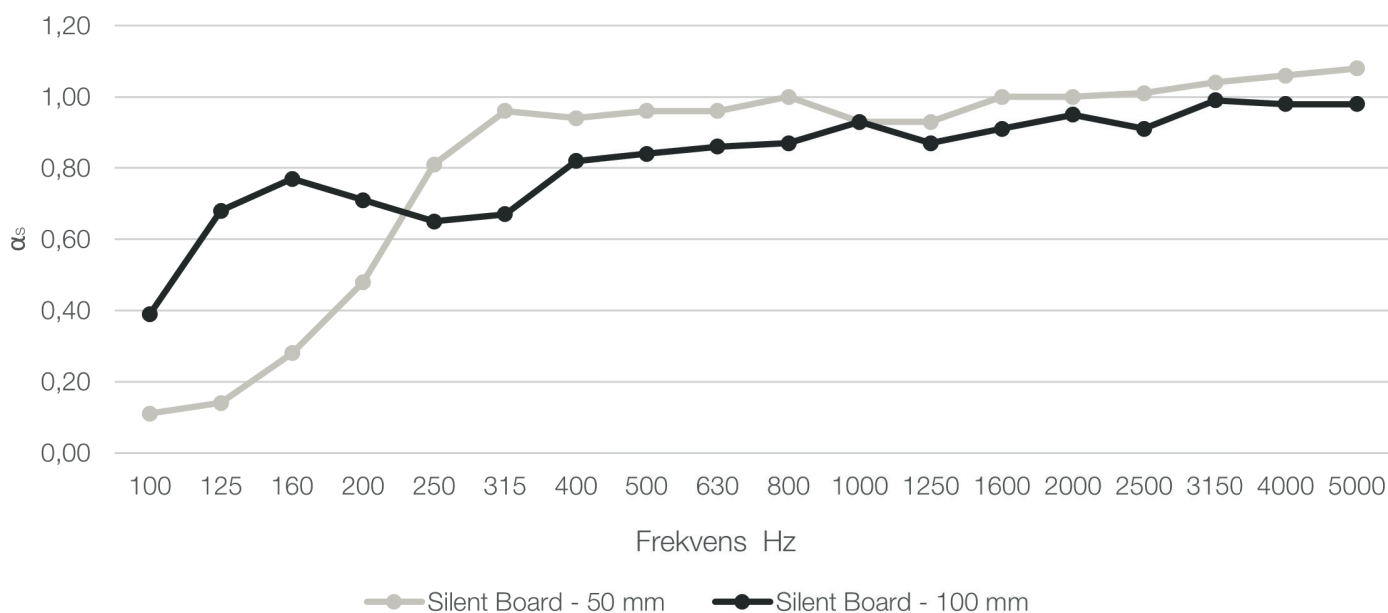

Frekvens Hz	Silent Board - 50 mm α_s	Silent Board - 100 mm α_s
100	0,11	0,39
125	0,14	0,68
160	0,28	0,77
200	0,48	0,71
250	0,81	0,65
315	0,96	0,67
400	0,94	0,82
500	0,96	0,84
630	0,96	0,86
800	1,00	0,87
1000	0,93	0,93
1250	0,93	0,87
1600	1,00	0,91
2000	1,00	0,95
2500	1,01	0,91
3150	1,04	0,99
4000	1,06	0,98
5000	1,08	0,98
NRC	0,93	0,84
α_w	0,95	0,90
Akustikklasse	A	A

DAMPA® Silent Board - 50 mm

Perforation: ST-716

Dybde: 50 mm

Åbent areal: 40,3%

Indlæg: 0,2 mm akustikfilt samt 40 mm mineraluld, densitet 55 kg/m³

DAMPA® Silent Board - 100 mm


Perforation: ST-716

Dybde: 100 mm


Åbent areal: 40,3%

Indlæg: 0,2 mm akustikfilt samt 2 x 40 mm mineraluld, densitet 55 kg/m³

DAMPA® Silent Board - 100 mm dyb

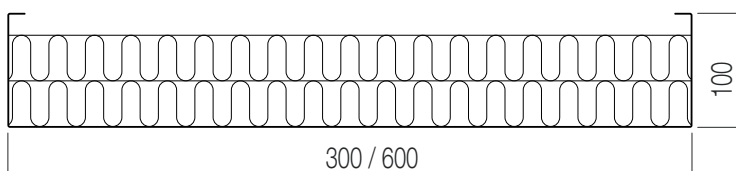

DAMPA® Silent Board - 50 mm dyb

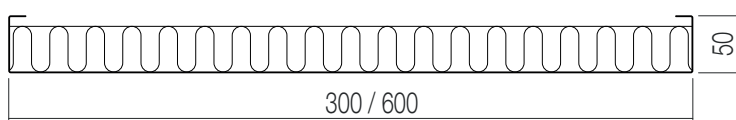

Perforation: ST-716

