


Absorptionsmålinger


DAMPA® Robust

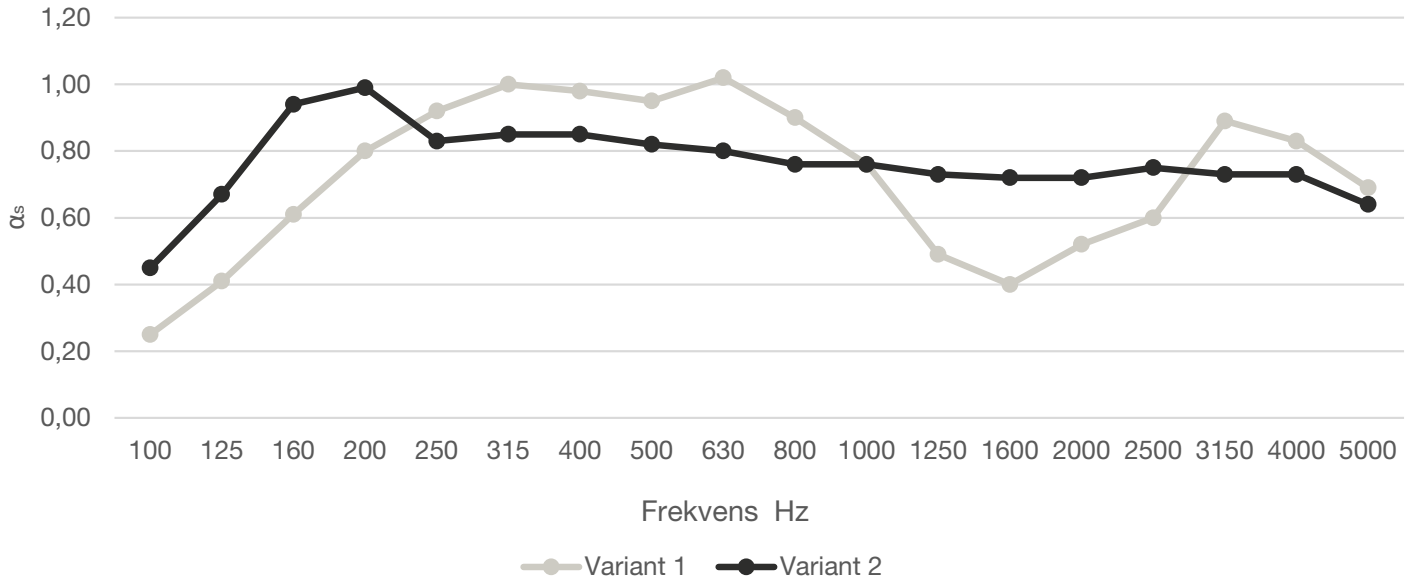

Frekvens Hz	Variant 1 Absorption α_s	Variant 2 Absorption α_s
100	0,23	0,45
125	0,21	0,67
160	0,53	0,94
200	0,70	0,99
250	0,71	0,83
315	0,75	0,85
400	0,73	0,85
500	0,77	0,82
630	0,78	0,80
800	0,65	0,76
1000	0,62	0,76
1250	0,68	0,73
1600	0,66	0,72
2000	0,64	0,72
2500	0,66	0,75
3150	0,68	0,73
4000	0,66	0,73
5000	0,60	0,64
NRC	0,70	0,78
α_w	0,70	0,75
Akustikklasse	C	C


Variant 1

DAMPA® Robust
 Perforation: AL-22
 Åbningsgrad panel: 17%
 Indlæg: 0,2 mm akustikfilt
 Panelstørrelse H x B x H:
 22 x 250 x 22
 Montage: Monteret i modul 250
 Nedhængshøjde: 200 mm


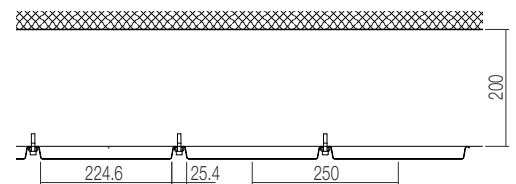


Variant 2

DAMPA® Robust
 Perforation: AL-22
 Åbningsgrad panel: 17%
 Indlæg: 0,2 mm akustikfilt samt
 100 mm batts i pose, densitet
 37 kg/m³
 Panelstørrelse H x B x H:
 22 x 250 x 22
 Montage: Monteret i modul 250
 Nedhængshøjde: 200 mm

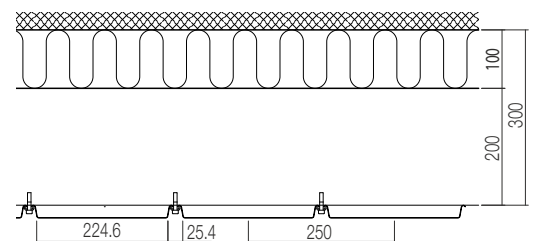

Perforation: AL-22



DAMPA®