


Sound absorption

DAMPA® Climate Ceiling

DAMPA® Clip-In with WLT-D | Suspended 200 mm | ST-15

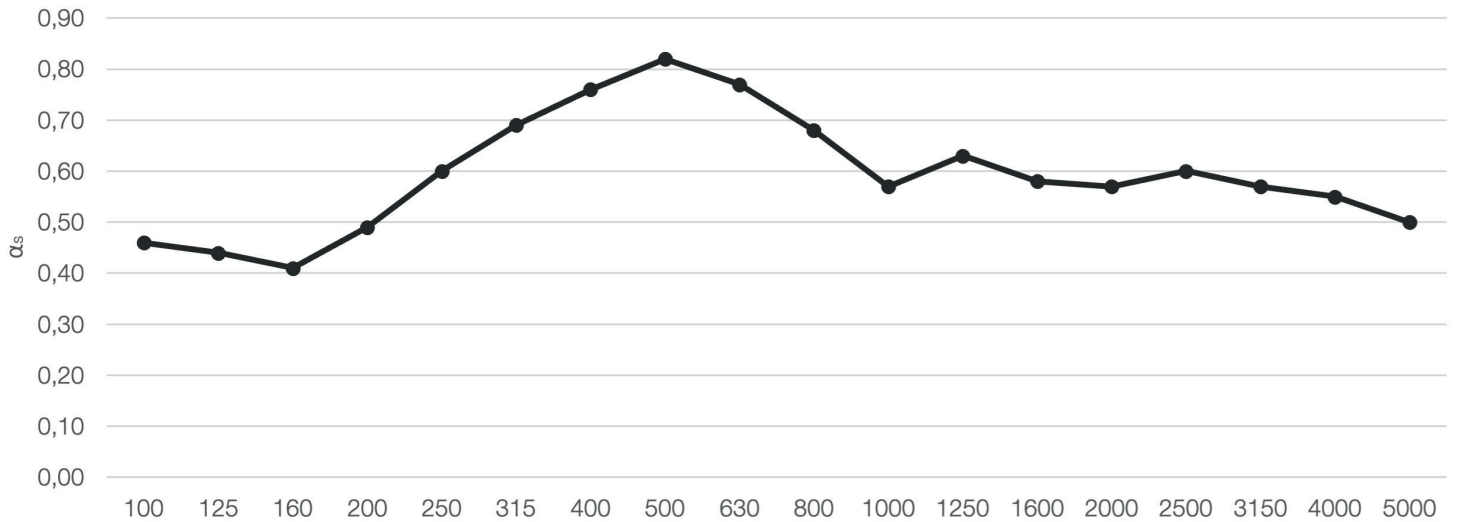

Frequency Hz	Absorption α_s
100	0.46
125	0.44
160	0.41
200	0.49
250	0.60
315	0.69
400	0.76
500	0.82
630	0.77
800	0.68
1000	0.57
1250	0.63
1600	0.58
2000	0.57
2500	0.60
3150	0.57
4000	0.55
5000	0.50
NRC	0.65
α_w	0.65
Acoustic class	C


DAMPA® Climate Ceiling

Perforation: ST-15



Open area ceiling: 20.5%

Inlay: 0,2 mm acoustic felt
and WLT-D 6 climate element

Suspension height: 200 mm

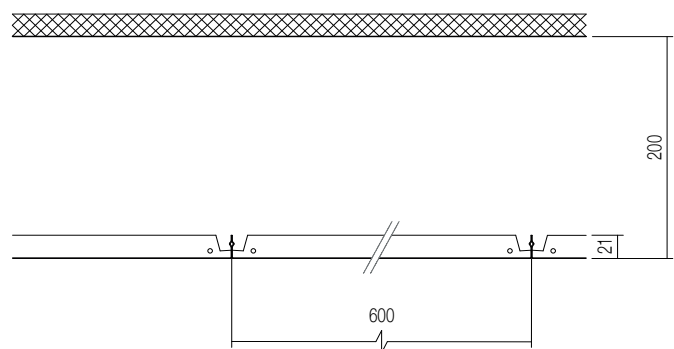

Perforation: ST-15

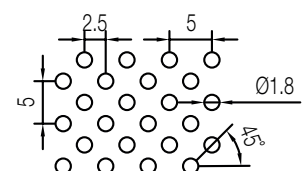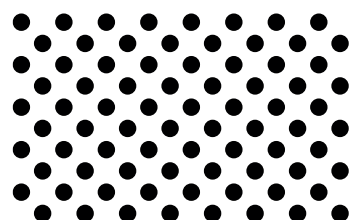

The stated data are classified in accordance with EN ISO 11654:1997