


# Absorptionsmålinger

## DAMPA® Silent Cloud

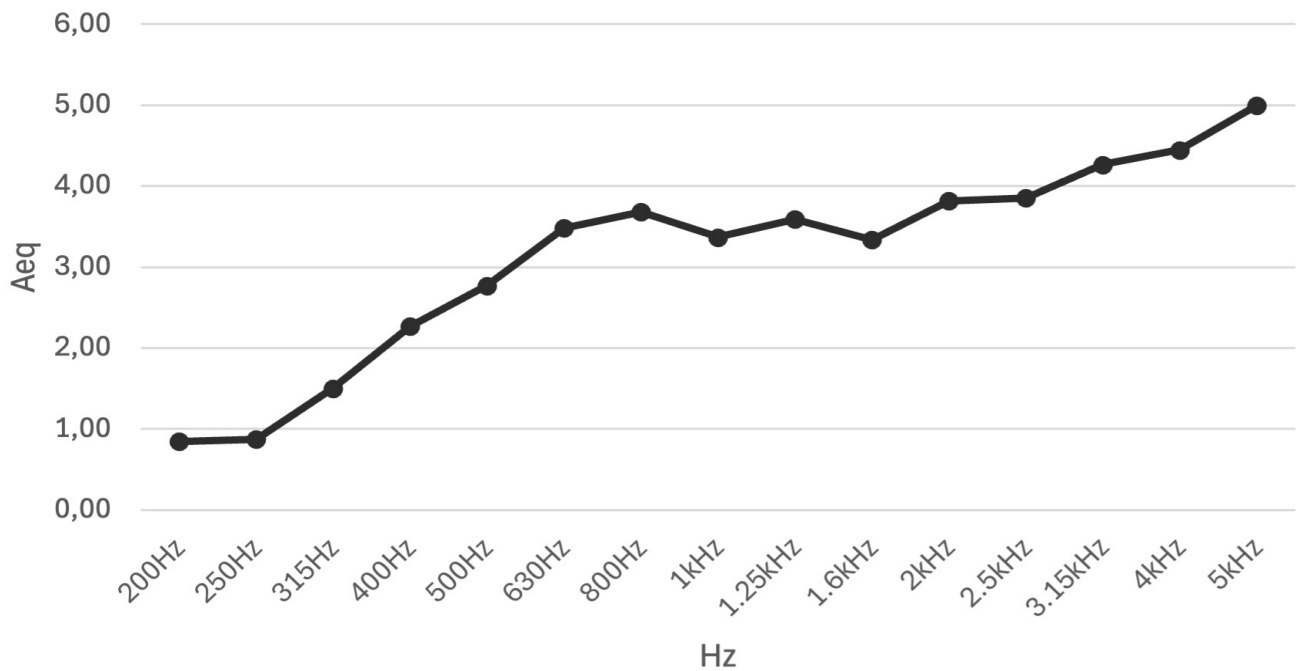

Frekvens Hz	Ækvivalent absorptionsareal Aeq*
200	0,85
250	0,87
315	1,50
400	2,27
500	2,77
630	3,49
800	3,68
1000	3,37
1250	3,59
1600	3,34
2000	3,82
2500	3,85
3150	4,27
4000	4,45
5000	5,00


### DAMPA® Silent Cloud

Perforation: AL-709



Størrelse: 1000 x 2000 x 50 mm

Åbent areal: 25,1%

Inlæg: 0,2 mm akustikfilt samt  
40 mm glasuld med alufolie på  
bagsiden, densitet 55 kg/m<sup>3</sup>

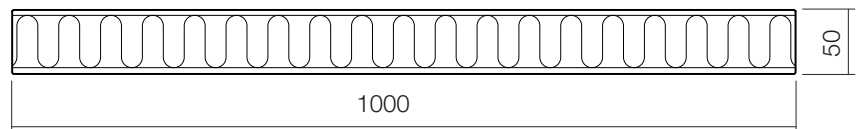

Perforation: AL-709

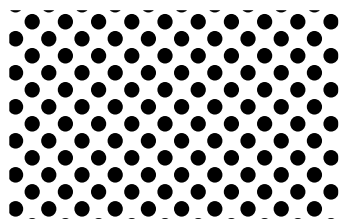

\*Der er foretaget egne målinger iht. ISO 354.